




1. Description

The E-MAAX Battery Hub PLUS (BHP) allows connection of two PLUS regulators to multiple battery sensors and to a Com Module Plus. BHP is required with the Com Module PLUS to control 2 regulators on 2 engine systems. The housing contains 3 connection ports on one side for the battery sensors; temperature, voltage and current (or BMS from a LiFePO $_4$ MAAX battery). The single port connection on the other side connects to the Com Module PLUS, with the remaining 2 wired connectors going to each of the E-MAAX PLUS regulators. The LED indicators flash green when a PLUS regulator is connected.

2. Specifications

Parameter	Value	Units
Weight	200	grams
Housing material	PVC	-
Operating range	-20 +80	Celsius deg
Protection	IP 56	-
Maximum allowable shock	3	G
Maximum allowable relative humidity	95	%

2. Dimensional outline

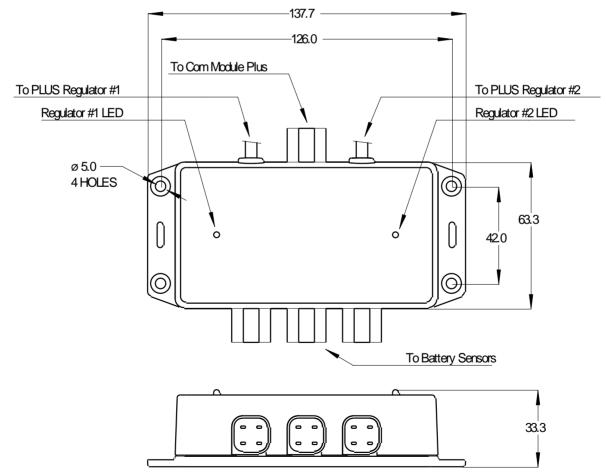

All units are millimeters






4. Electrical specifications

Parameter	Value	Units
DC voltage supply range	620	Volts
Current consumption	0.020	Amps
LED color	Green	-
Cable ratings	Gauge: 20 AWG	-
	Material: tinned copper strands	
	Strand size: Ø 0.16 mm	
	Insulator Material: PVC	
	Jacket Color: black	
	Diameter: 5.5 mm	
Communications format	RS-485	-
Wire colors designations	black – battery negative (isolated from the housing)	-
	red – DC supply (isolated from the housing)	
	white – communication lead "A"	
	yellow – communication lead "B"	
Connector pin-out	1 - black – battery negative	-
	2 - red – DC supply	
	3 - white – communication lead "A"	
	4 - yellow – communication lead "B"	

4-pin connector pins, view from the cable side (insertion)



Notice

ElectroMaax reserves the right to make product modifications or discontinue products without notice. Customers are advised to obtain latest written specifications prior to ordering products. Information provided by ElectroMaax is believed to be accurate at the time of its release. Products sales are subject to the ElectroMaax Terms of Sales in force at the time of order acknowledgment. ElectroMaax products are not designed, authorized, or warranted for use in life support devices and systems, or any other critical applications which may involve death, injury, property or environmental damages. Using ElectroMaax products for any critical application is fully at the risk of the customers and their end users and assigns.

Canada: 5552 King St, Beamsville, ON LOR 1B3

Phone: 905-945-8800 Fax: 905-563-8806

USA:

Unit 5, 6405 Inducon Drive West, Sanborn, NY 14132

1-866-945-8801

Revision - 0